

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : B60K 23/04, F16H 63/40		A1	(11) International Publication Number: WO 93/01065
			(43) International Publication Date: 21 January 1993 (21.01.93)
(21) International Application Number: PCT/SE92/00461 (22) International Filing Date: 24 June 1992 (24.06.92) (30) Priority data: 9102027-1 1 July 1991 (01.07.91) SE (71) Applicant: SAAB-SCANIA AKTIEBOLAG [SE/SE]; S-151 87 Södertälje (SE). (72) Inventors: WARMENIUS, Bo ; Tjusarstigen 73, S-155 00 Nykvarn (SE). MAGNUSSON, Thomas ; Förvaltarvägen 19, S-151 47 Södertälje (SE). (74) Agent: WALDEBÄCK, Hans; Saab-Scania AB, Scania Trucks & Buses, Patent, S-151 87 Södertälje (SE).			(81) Designated States: BR, DE, GB, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IT, LU, MC, NL, SE). Published With international search report. In English translation (filed in Swedish).

(54) Title: ARRANGEMENT FOR CONTROLLING THE DIFFERENTIAL LOCK IN A MOTOR VEHICLE

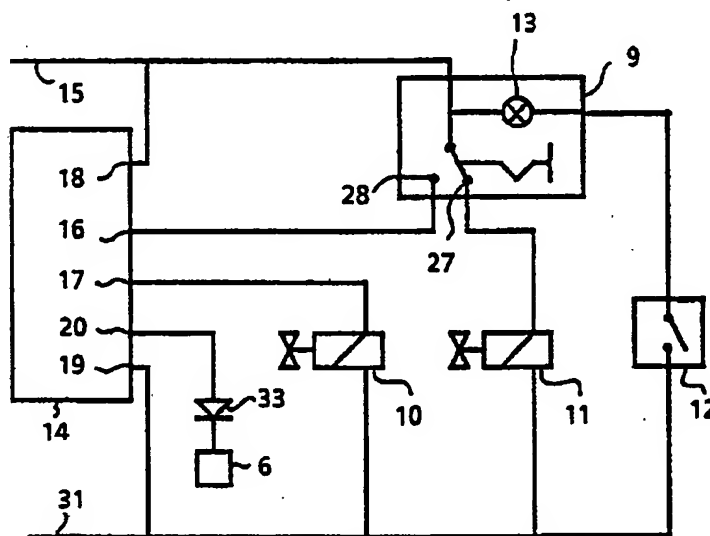

(57) Abstract

An arrangement for engaging a differential lock in a vehicle incorporating a control unit (14) which firstly engages the differential lock via servo mechanisms (10) and secondly reduces the speed of the engine during engagement via an engine control unit (6). The control unit (14) incorporates a time delay circuit which ensures that the differential lock is engaged with a certain time delay after the engine speed has been reduced. The arrangement enables the engagement to take place quickly and automatically without the risk of the driving wheels of the vehicle spinning during engagement.

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	MI	Mali
AU	Australia	FR	France	MN	Mongolia
BB	Barbados	GA	Gabon	MR	Mauritania
BE	Belgium	GB	United Kingdom	MW	Malawi
BF	Burkina Faso	GN	Guinea	NL	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IE	Ireland	RO	Romania
CA	Canada	IT	Italy	RU	Russian Federation
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark	MG	Madagascar		
ES	Spain				

Arrangement for controlling the differential lock in a motor vehicle

This invention relates to an arrangement according to the preamble to patent claim 1 attached.

State of the art

5 In a motor vehicle, particularly in a heavier vehicle such as a truck, it is normal for its transmission to incorporate a differential lock. By activating the differential lock the driving characteristics of the vehicle can be substantially improved, e.g. on a slippery surface. Driving with the
10 differential lock engaged also has disadvantages which curtail the possibilities of controlling the vehicle. For this reason it is preferable not to drive with the differential lock permanently engaged but to be able to engage it when necessary and disengage it in all other types of driving.

15 The engagement of the differential lock brings about a mechanical, rigid coupling in the differential gear of the vehicle. If the differential gear is engaged whilst one of the wheels of the vehicle is spinning there is a high risk that the differential lock will be damaged because it will then be subjected to excessive stresses.

20 As a solution to this problem a method is known from SE 404 675 for preventing the engagement of the differential lock until the clutch pedal of the vehicle has been depressed. This gives rise to an interruption in the driving force which prevents a wheel from skidding during engagement of
25 the differential lock. At the same time the transmission is not subjected to driving moments from the engine during engagement.

Under certain driving conditions at least, this solution is in fact one solution to the above-mentioned problem, but it can create other problems instead.
30 The driver has to operate several controls, and the time it takes to carry out these operations can be fairly long, giving the vehicle speed time to drop considerably before the driving force returns. The speed may therefore have time to drop substantially, particularly when driving uphill on a slippery surface, which means that it will also be necessary to select another gear. For

certain vehicle types, at any rate, clutch control can be a relatively cumbersome operation. Moreover, every clutch operation gives rise a certain amount of wear on the clutch.

5 Object of the invention

The object of this invention is to solve the problem described without entailing the above-mentioned disadvantages. The object of the invention is therefore to ensure that the differential lock can be engaged without the
10 risk of damage to the same by making sure that no driving wheel is spinning during engagement. In cases where a wheel is already spinning, the invention must ensure that this spinning stops before the differential lock is engaged. A further object is to ensure that the differential lock can be engaged easily without the need for several different control movements.
15 Another object is to ensure that the engaging time is reduce, thereby reducing the risk that the speed of the vehicle might be reduced during engagement.

Brief description of the invention

20 According to the invention this is achieved by designing the arrangement with the special features indicated in the characterising part of patent claim 1 attached. Because the control unit therefore automatically controls both the engagement of the differential lock and the engine acceleration during
25 engagement, both these activities can be optimised relative to each other. The differential lock can be engaged quickly whilst keeping the deceleration time short. The operation will be simple because only a single control need be operated. The engagement can take place without the risk of the driving wheels spinning during engagement, and without the risk of damage to the
30 differential lock.

Further special features and advantages characterising the invention are indicated in the following description exemplifying two embodiments of the invention. The description is given with reference to the attached drawings.

35

Description of the drawings

- Figure 1 shows diagrammatically a vehicle with a differential gear,
Figure 2 is a wiring diagram of an arrangement for controlling a
5 differential lock,
Figure 3 shows an electrical control unit incorporated in the
arrangement,
Figure 4 is a signal diagram for the electrical control unit, and
Figure 5 shows a modified embodiment of the invention applied to a
10 tandem driven truck with pneumatic suspension.

Description of an exemplifying embodiment

Figure 1 shows diagrammatically a vehicle 1, such as a truck or other heavier
15 vehicle. At the front end of vehicle 1 is arranged a driving engine 2, which
transfers driving force, via a transmission 3, to the rear driving wheels 4 of
the vehicle. The acceleration of engine 2 is controlled by the driver by means
of a so-called electric accelerator pedal 5, which means that the transmission
between the accelerator pedal and the engine takes place electrically
20 instead of mechanically. For this purpose an electrical control unit 6 is
connected to the engine and controls the acceleration of engine 2
dependent, among other things, on signals from accelerator pedal 5. Engine
control unit 6 is also connected to other transmitters in the vehicle for
optimum control of engine 2. Transmission 3 incorporates, conventionally, a
25 differential gear 7 on the drive shafts for driving wheels 4. Differential gear
7 incorporates a differential lock 8, by means of which driving wheels 4 of
the vehicle can be mechanically coupled together. Differential lock 8 is
controlled by means of pneumatic servomechanisms which are controlled by
means of electrical solenoid valves.

30

Figure 2 is an explanatory wiring diagram of an arrangement for controlling
differential lock 8. A manual switch 9, for engaging and disengaging
differential lock 8, is arranged near the driver's seat. Near differential gear 7
are arranged two solenoid valves 10, 11, one solenoid valve 10 of which,
35 when activated, supplies compressed air to the servomechanisms of
differential lock 8 for engaging differential lock 8, whilst the other solenoid
valve 11, when activated, de-aerates the servomechanisms, thereby

disengaging differential lock 8. Near differential lock 8 is arranged a mechanical switch 12, which closes when differential lock 8 is engaged and which opens when it is disengaged. This switch 12 is connected in series to a control lamp 13, which is used to indicate when differential lock 8 is engaged. In this example control lamp 13 is built into control switch 9, as shown in Figure 2.

The arrangement also incorporates an electrical control unit 14, whose function is described in greater detail below with reference to Figures 3 and 4. This control unit 14 is connected via an input 16 to control switch 9, via a first output 17 to solenoid valve 10 for engaging differential lock 8, and via connections 18, 19 to feed cables 15, 31 in the vehicle. One feed cable 15 constitutes a positive feed and the other feed cable 31 constitutes an earth cable. These feed cables 15, 31 are also connected to the other components, as shown in Figure 2. In addition, control unit 14 is connected via a second output 20 to engine control unit 6 via a diode 33 locking against inverse currents.

Figure 3 shows control unit 14 in the form of a functional diagram. The symbols used in Figure 3 for connections 16-20 are the same as those used in Figure 2. Control unit 14 is connected via inputs 18, 19 to feed cables 15, 31 for driving its different sub-components.

Figure 4 illustrates the different signals at input 16 and outputs 17, 20 of the control unit relative to each other along a time axis. When the driver wants to engage differential lock 8, he moves switch 9 to an activated position 28, whereupon a voltage is supplied, via input 16, to an input stage 21 in control unit 14. Curve A in Figure 4 represents the signal at input 16. When switch 9 is in a non-activated position 27, the signal is low, i.e. no voltage is applied to input 16. When the switch is moved to the activated position 28, the signal will be high and it will remain high as long as switch 9 is in this position. Whilst input stage 21 is receiving voltage a circuit 22 is activated which generates a time-limited voltage pulse 23, which is supplied to an output circuit 24. This output circuit 24 is connected via output 20 to engine control unit 6. Curve B in Figure 4 represents the signal at output 20 to engine control unit 6. This signal is low in the non-activated position 27 of switch 9. When switch 9 is moved to its activated position 28, the signal at input 16

- will become high, whereupon the time- limited pulse 23 will be applied to output 20. During the time this pulse 23 is applied the acceleration of engine 1 will automatically be reduced to idling speed, or to another selected reduced speed, regardless of the action of accelerator pedal 5. Time T which this pulse 23 lasts should be between 0.5 and 2 seconds, preferably approximately 1.0 second, depending on which engine 1 and differential lock 2 is used. Time T of pulse 23 should be chosen so that it is sufficiently long firstly to allow engine 2 time to slow down safely to idling speed, and secondly to allow differential lock 8 time to be engaged. At the same time, time T should not be unnecessarily long since it delays returning to normal acceleration. When this time T has expired the voltage at output 20 ceases to be applied and the acceleration returns to that determined by the position of accelerator pedal 5, or by other engine parameters.
- Whilst pulse 23 is generated a time delay commences in a parallel time delay circuit 25, which after a predetermined time t activates a second output circuit. This applies a voltage to the second output 17, which is connected to solenoid valve 10 for engaging differential lock 8. This time delay t should be between 0.1 and 0.5 seconds. In tests times of between 0.2 and 0.4 seconds, and particularly around 0.3-0.4 seconds, have proved suitable. This time t should be chosen so that it is sufficiently long to allow engine 1 time to slow down safely to idling speed for the engagement of differential lock 8, but at the same time no longer than necessary. Curve C in Figure 4 represents the signal at output 17 to the solenoid valve for engaging differential lock 8. During the predetermined time t, after the signal at output 20 has become high, the signal at output 17 will also be high and will remain high as long as the signal at input 16 is high.
- Whilst voltage is applied to output 17 differential lock 8 will be engaged. Voltage is then applied to output 17 until the driver disengages differential lock 8 by operating switch 9. When this happens the voltage supply to input 18 is disconnected, and voltage is instead applied directly from switch to solenoid valve 11, which disengages differential lock 8. When differential lock 8 is disengaged neither engine control unit 6 nor the acceleration of engine 1 is affected.

Figure 5 is a modified wiring diagram for using the invention in another vehicle, namely a truck with a pneumatically suspended tandem bogie incorporating two driving rear axles. Each axle incorporates a differential gear and there is also a differential gear which splits the driving force
5 between the two driving axles in the bogie. The vehicle therefore has a total of three differential gears, each of which is provided with a differential lock. To facilitate control of these, however, only two separate switches are used, one of which controls the differential lock between the axles and the other controls together the two differential locks on the respective axles.

10 In this type of vehicle all four driving wheels in the bogie are normally used to provide a high loading capacity. During driving on a slippery surface and with a light load the contact pressure between the tyre and the road surface may be low, causing the wheels to skid. By de-aerating the air bellows
15 incorporated in the pneumatic suspension for the rear driving axle, this axle is prevented from absorbing any load exceeding its own weight. Instead the load on the front driving axle will increase, hopefully also causing the slipping to stop. Before the rear axle is being de-aerated it is first necessary to engage the differential lock, at least the differential lock located between
20 the axles, but suitably also the other differential locks.

The arrangement shown in Figure 5 for controlling the differential lock for the differential gear between the axles indicates that its right-hand section has the same structure and operation as described above. The only
25 difference is that it is a differential gear between two axles instead of a differential gear on one driving axle. Despite this difference the same reference symbols as used earlier are used for this figure, where possible. To control the differential locks on the respective axles an arrangement can be used such as that described above with reference to Figures 2 and 3.

30 The air bellows of the rear axle are controlled by means of a manual adjustable switch 30 on the instrument panel of the vehicle. Switch 30 applies voltage, when activated, to a solenoid valve 31, which evacuates the air in the air bellows. At the same time voltage is applied to input 16 on an
35 electronic unit 14 similar to that described earlier. A diode 32 is arranged on a cable between pneumatic suspension switch 30 and input 16 for locking against inverse currents. When the pneumatic suspension switch 30 has been

activated and voltage applied to input 16, engine 1 slows down to the idling speed in similar fashion to that described earlier. After a certain time delay differential lock 8 is engaged. Thus the engagement can take place without any appreciable driving force being transferred in transmission 6 and
5 without the risk of differential lock 8 being subjected to high stresses.

The invention described in the two examples enables the differential lock to be engaged without the driver having to perform any additional control movements to actuate the acceleration of engine 1. Because the
10 arrangement is therefore independent of the control movements of the driver the differential lock engagement time can be optimised. For example, when a vehicle is being driven on a slippery surface uphill, it is extremely important that the differential lock can be engaged quickly, otherwise there is a risk that the vehicle will come to a complete standstill before the
15 differential lock is fully engaged and the driving force restored.

The invention only involves minor modifications to existing components in a vehicle. Most of the components, for example engine control unit 6 described, are already installed on many modern vehicles. Such engine
20 control units 6 already incorporate inputs which, when voltage is applied to them, reduce the speed of engine 1 to idling speed. This is used, for example, if the vehicle is equipped with an electrical booster brake, a so-called retarder. When this is activated the engine speed is also reduced to idling speed. If there are in this case several connections to engine control
25 unit 6, they should be separated by means of diodes 33, as shown in Figures 2 and 5, to prevent inverse currents.

Electronic unit 14 is described above mainly on the basis of its functional operation because its component parts themselves consist of conventional
30 electronic solutions for forming circuits 22, 23, 24, 26 for pulse generation 22, time delay and driving stage.

According to the exemplified embodiments the signals are transmitted to outputs 17, 20 under full time control, and there is no feedback to indicate
35 that the engine speed is actually being reduced or that differential lock 8 is actually being engaged. This means that the solution will be simple. In more advanced embodiments of the invention it is conceivable to arrange a

feedback to reduce the length of time pulse T and time delay t in order to reduce the time for engagement of differential lock 8. However, in tests carried out the use of the arrangements described, with a simple timed control, has proved satisfactory.

5

Within the scope of the patent claims attached the invention can be modified and designed differently from the examples given in the description.

10

PATENT CLAIMS

1. Arrangement for controlling a differential lock incorporated in a vehicle transmission (3) connected to an engine (2), having a switch (9) for initiating engagement of the differential lock (8), and at least one solenoid valve (10) incorporated in a pressure medium operating servo system for engagement of the differential lock (8),
5 *characterised in*
that an electrical control unit (14) is connected to be activated by the switch (9) and is designed to activate the solenoid valve (10),
that the control unit (14) is connected to an engine control unit (6)
10 which actuates the acceleration of the engine (2), and
that the control unit (14) incorporates a time delay circuit (25) which transmits an output signal for activating the solenoid valve (10) for a certain time (t) after an output signal has been transmitted to the engine control unit for reducing the acceleration of the
15 engine.
2. Arrangement according to patent claim 1, *characterised in* that the control unit (14) is designed to transmit a time-limited output signal (23) to the engine control unit (6).
20
3. Arrangement according to patent claim 1, *characterised in* that the control unit (14) is designed to transmit an output signal (23) to the engine control unit (6) which reduces the speed of the engine (2) to idling speed.
25
4. Arrangement according to patent claims 1-3, *characterised in* that the differential lock (8) is incorporated in a differential gear (7) between two driving wheels (4) on the same vehicle axle.
- 30 5. Arrangement according to patent claims 1-4, *characterised in* that the differential lock is incorporated in a differential gear between two driving vehicle axles in a bogie.

6. Arrangement according to patent claim 5, *characterised* in that the control unit is connected to a second switch designed to control the de-aeration of a pneumatically suspended driving axle in a tandem bogie, and
- 5 that the control unit, when activated by the second switch, is arranged to transmit automatically the same output signals for engaging the differential lock and for reducing the engine speed as in the activation of the first-mentioned switch.
- 10 7. Arrangement according to patent claims 1-2, *characterised* in that the control unit (14) is arranged to transmit output signal (23) to the engine control unit (6) for a time (T) of 0.5 to 2.0 seconds, preferably approximately 1.0 second.
- 15 8. Arrangement according to patent claims 1-2, *characterised* in that the control unit (14) is arranged to transmit an output signal to the solenoid valve (10) with a time delay (t) of 0.2 to 0.4 seconds, preferably approximately 0.3 seconds after the control unit (14) has begun to transmit an output signal (23) to the engine control unit (6).

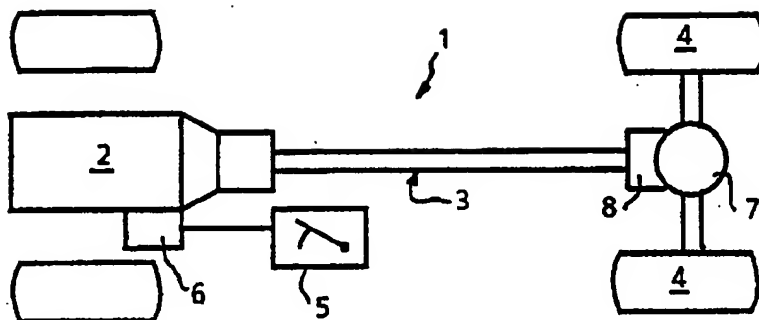
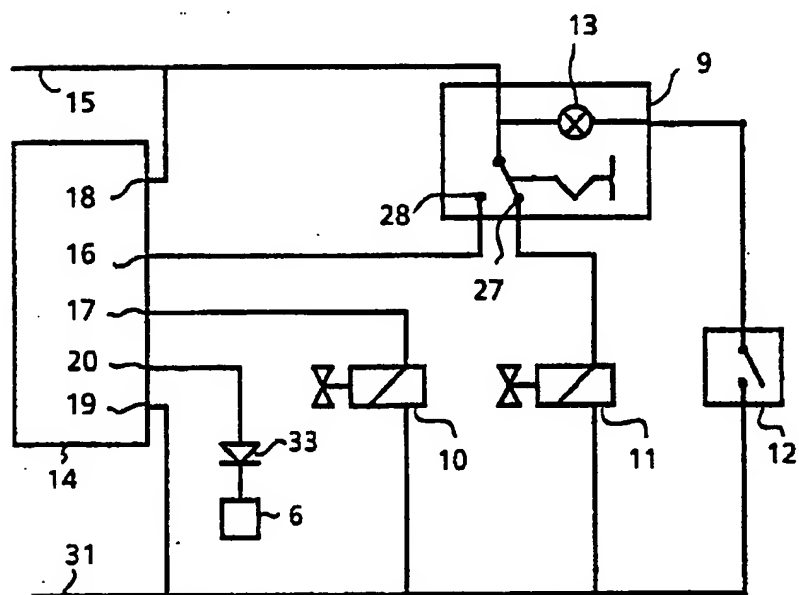


FIG 1

FIG 2



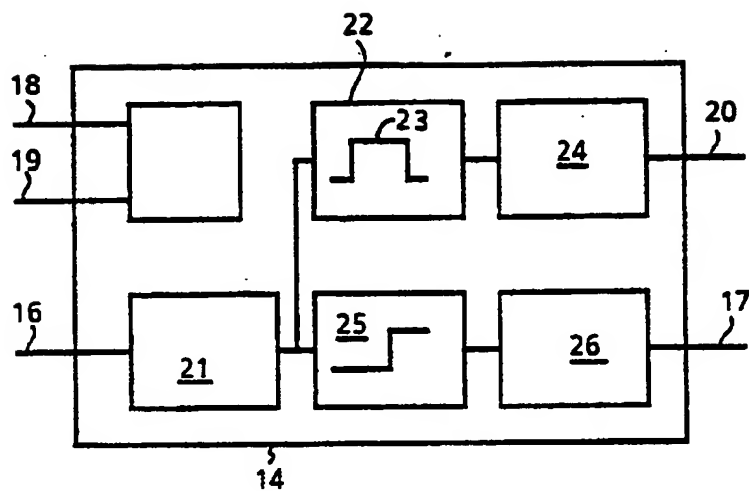


FIG 3


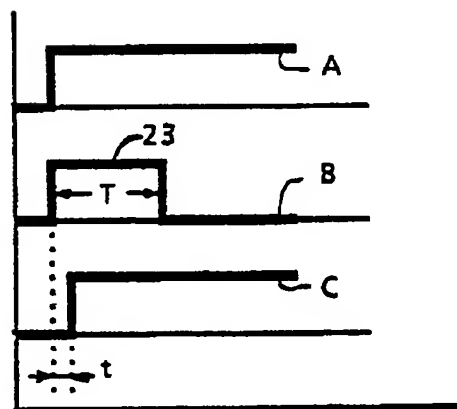


FIG 4

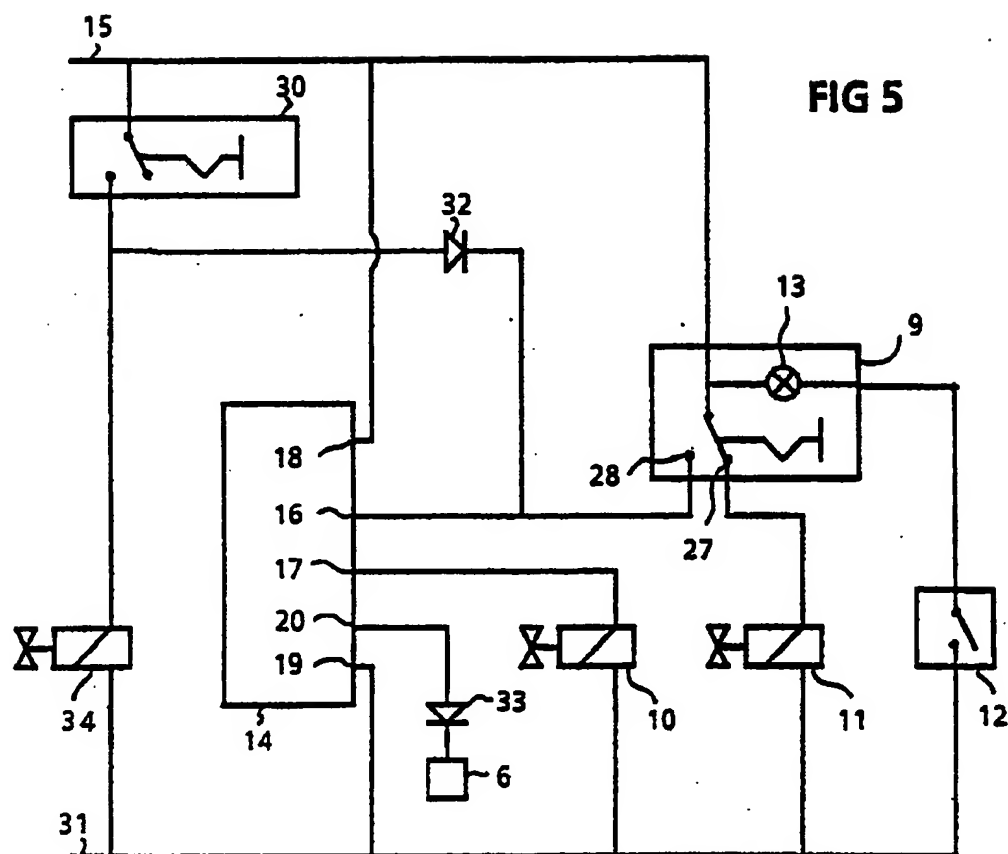

INTERNATIONAL SEARCH REPORT

International Application No PCT/SE 92/00461

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
IPC5: B 60 K 23/04, F 16 H 63/40		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
IPC5	F 16 H; B 60 K	
Documentation Searched other than Minimum Documentation to the extent that such Documents are included in Fields Searched ⁸		
SE,DK,FI,NO classes as above		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
A	US, A, 4549448 (KITTLE) 29 October 1985, see the whole document ---	
A	US, A, 4523494 (SPARKS ET AL) 18 June 1985, see the whole document ---	
A	US, A, 4347760 (JEWETT) 7 September 1982, see the whole document ---	
A	SE, B, 404675 (S DÖLERUD ET AL) 23 October 1978, see the whole document -----	
<p>¹⁰ Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"B" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
30th September 1992	05 -10- 1992	
International Searching Authority	Signature of Authorized Officer	
SWEDISH PATENT OFFICE	P-O Warnbo	

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.PCT/SE 92/00461

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the Swedish Patent Office EDP file on **28/08/92**.
The Swedish Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 4549448	85-10-29	AU-B- 559614	87-03-12
		AU-D- 2832284	84-12-20
		CA-A- 1215558	86-12-23
		EP-A-B- 0128477	84-12-19
US-A- 4523494	85-06-18	AU-B- 559613	87-03-12
		AU-D- 2832184	84-12-20
		CA-A- 1221558	87-05-12
		EP-A- 0128436	84-12-19
US-A- 4347760	82-09-07	AU-B- 536710	84-05-17
		AU-D- 6784681	81-08-17
		CA-A- 1152355	83-08-23
		DE-A- 3176508	87-12-10
		EP-A-B- 0043849	82-01-20
		WO-A- 81/02188	81-08-06
SE-B- 404675	78-10-23	NONE	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:



BLACK BORDERS

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINE(S) OR MARK(S) ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.